

Benefits

- 8mm twin horizontal wires & 6mm vertical wire
- Extra wire increases panel strength
- 50mm x 200mm mesh pattern
- Anti tamper fixings for a secure installation
- Galvanised & polyester powder coated panels & posts
- EPDM inserts for noise reduction
- Full length clamp bars for flush playing side of pitches
- Fixings every 400mm



The Sportif 8 sports fencing is a unique mesh configuration that is commonly found in sports MUGA and outdoor sport applications in France & Europe.

The Sportif 8 is designed with a unique 150mm x 150mm mesh pattern at the top and a 50mm x 150mm open mesh configuration typically at the bottom 1.2 metre high impact zone. The open mesh pattern at the top of the panel provides more visibility to spectators, whilst also still increasing ball retention.

Each Sportif 8 sports fencing panel is manufactured with 8mm dual horizontal wires and sandwiches single vertical wires providing a rigid and strong fencing panel. With fixings every 200mm to the lower, high impact areas of the fencing and rubber inserts at each fixing, rattle is virtually eliminated during play. Clamp bars covering panel ends ensures a safe playing surface with no sharp edges.

This is ideal for MUGAs and sports pitches where the noise from ball impacts is not likely to cause a problem with local residents. Supplied with EPDM inserts

Duo Sports Lite sports mesh fencing is available with gates designed to suit the fence line and can be supplied in your choice of RAL colours which can match your organisation, club or team colours.

Each post can be supplied for dig in-ground, bolted down or cranked over the wall, depending upon your requirement.



Finish

Galvanised & polyester powder coated, after stringent cleaning & treatment to give a well adhered coating with a minimum of 60 microns. Available in a full range of RAL colours including marine coating.

Posts & Fixings

The Sportif double wire mesh fencing system features a post, EPDM rubber inserts and clamp bar configuration, providing a simple and easy method of installation. Supplied with vandal-proof security fixings and installed using either power or hand tools.

Sloping Ground

Panels may be stepped in increments of 30mm as required within the clamp bar system. If the gradient exceeds 1:16 it is recommended that the taller panels are either part buried or additional posts are used.

Variations


Posts are available in different lengths to accommodate panel heights and ground conditions. Additional variations are also available:

- Wall fixing, cranked posts or base plated
- Cranked panels
- Extended posts for CCTV, lighting or physical security devices

Gates:

Pedestrian gates are single leaf 1.2m wide, (or width to suit), framed in a 50mm x 50mm RHS with Zaun Duo8 mesh welded inside the frame, with slide latch. Gate supplied with rubber bump stop and 2 x suitable gate posts.

Vehicle access gates are double leaf (single leaf vehicle gates available) 3.0m wide (or width to suit), framed in 50mm x 50mm RHS, with Zaun Duo8 mesh welded inside the frame, with drop bolts and slide latch. Gate supplied with rubber bump stop and 2 x suitable gate posts.

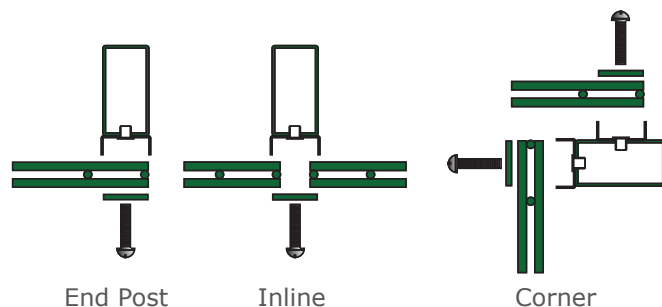

Specification

Height: 2280mm

Note: Other heights are also available upon request

Panel Width: 2580mm

Mesh Size: 50 x 150mm at lower
1.2m with 150 x 150mm
above

Wire Diameter: 6mm Verticals
2 x 8mm Horizontals

Top Edge Projection: 22mm as standard /
optional flush

Panel Width: 80 x 40mm

Clamp Bar Size: 40 x 5mm

Post Centres: 2605mm

Fixing Centres: 200mm to lower 1.2m
400mm above

Fixings: Anti Tamper Security
Fixings

Applications



Drawings

DWG and PDF drawings available from our website www.zaun.co.uk/drawings

Version 20201117