




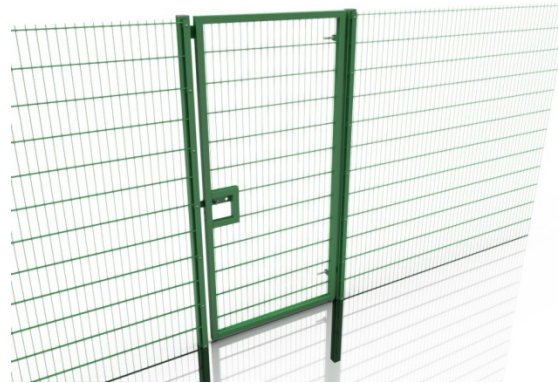
## SR1 Rated Gates

### Applications:

-  Civic & Public Sector
-  Health & Emergency Services
-  High Security
-  Industrial
-  Schools & Education
-  Transport & Infrastructure
-  Utilities

### Drawings:

Download our drawings direct from our website:  
[www.zaun.co.uk/about-us/downloads/drawings/](http://www.zaun.co.uk/about-us/downloads/drawings/)



### Features & Benefits:

- Security rated at SR1 LPCB LPS1175 by BRE as featured in the Red Book
- Supplied in either Duo8 or HiSec 358 mesh infills
- Available in heights of 1.8, 2.0, 2.4 and 3 mtrs
- Supplied in either single leaf or double leaf options
- Single leaf maximum width 1.6 mtrs
- Double leaf maximum width 7.1 mtrs
- In-ground or base plated post fixing options
- Available in your choice of RAL colours
- Supplied with SR rated locks
- Secured By Design approved

### Description:

SR1 Rated Gates, manufactured by Zaun, specifically with security in mind. SR1 rated gates, tested and approved to LPS 1175 Issue 7 by the Loss Prevention Certification Board (LPCB) and tested by the Buildings Research Establishment (BRE). This testing process has led to our products entered into The RED BOOK. Our SR1 Rated Gates suitable for either pedestrian or vehicle access and are the perfect accompaniment to our SR rated fencing solutions. Each gate supplied with welded mesh infills Duo8 SR1 or HiSec SR1.

All products, also rigorously tested for resistance to deliberate attack and play an important role in protecting people and property against physical attack, burglary, vandalism and terrorism. Our SR1 rated gates' LPS 1175 approval specifically covers the approval and listing of intruder resistant building components, strong points, security enclosures and free-standing barriers. SR1 rated gates, designed with an additional over clip and also special shear-drive bolts to the top and bottom of the mounting post of Zaun's standard Duo8 gate to give the gates their SR1 rating. For the HiSec 358 gate a clamp bar at the side of the gate post is included with through bolts and stainless steel fixings.

## Details:

Heights of 1.8m, 2.0m, 2.4m or 3m

### **Infill Mesh:**

HiSec SR1 mesh comprising of 12.7mm x 76.2mm mesh with single 4mm vertical wires at 76.2mm centres and 4mm horizontal wires at 12.7mm centres.

Or

Duo8 SR1 Mesh comprising of 50mm x 200mm mesh with single 6mm vertical wires at 50mm centres and twin 8mm horizontal wires at 200mm centres

### **Width:**

Single Leaf up to a maximum of 1.6m

Double Leaf up to a maximum of 7.1m

### **Lock:**

Slide latch lock with SR rated padlock

### **Finish:**

Materials are galvanised and Polyester Powder coated.

### **Drawings:**

[www.zaun.co.uk/about-us/downloads/drawings/](http://www.zaun.co.uk/about-us/downloads/drawings/)

### **Technical Support**

Should you require any help or assistance in your requirement please contact

[sales@zaun.co.uk](mailto:sales@zaun.co.uk) or

call +44 (0)1902 796 699

### **Turnkey Solutions**

Zaun can provide you with solutions to suit all of your sport and perimeter protection requirements, whether you need to protect a school playground or a military base, Zaun has the solutions for you. From perimeter and sports fencing to CCTV and access control, Zaun can provide solutions to your specific requirements.

For more information on any of our products or services please visit our website at:

[www.zaun.co.uk](http://www.zaun.co.uk)