


Gemini 8 Deep Concave Clamp

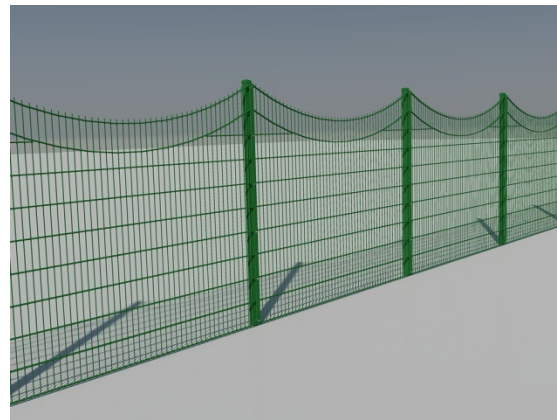

Features & Benefits:

- Based on the Duo twin wire mesh system to provide high visibility, strength and rigidity
- Supplied with an attractive deep concave style feature topping
- Attractive and aesthetically pleasing mesh system
- The Gemini range is ideal as a feature fence to enhance aesthetics
- Soft ornate fencing without harsh edges
- Supplied with anti-tamper fixings
- Available with optional ball finials
- Available either bolt down, in ground or on wall

Applications:

-  Civic & Public Sector
-  Health & Emergency Services
-  Industrial
-  Residential & Commercial
-  Schools & Education
-  Transport & Infrastructure

Drawings:

Download our drawings direct from our website:

www.zaun.co.uk/about-us/downloads/drawings/

Description:

The Gemini range is possibly the most attractive fencing system on the market. **Gemini Deep Concave** features a curvaceous style which has the ability to break up rigid fence lines. **Gemini Deep Concave** features a deep curved fence topping and is perfect for areas that are either aesthetically sensitive or are on show to the public or customers.

Based on the twin wire Duo system, **Gemini Deep Concave** uses twin horizontal wires to sandwich the vertical wires creating a strong twin wire mesh. Anti-tamper fixings and optional ball finials combine to make this system both attractive and secure. Due to its strength and great looks, **Gemini Deep Concave** fencing is ideal for housing projects, schools and prestige projects where the fence needs to be a feature as well as a boundary.

Gemini Deep Concave can be supplied in heights of up to 6 metres, which is measured at post height, so the panels may exceed that height at the centre of the panel

Details:

Minimum height of 830mm to maximum height of 6.0 metres – Gemini Deep Concave Perimeter Fencing

Mesh:

Duo6 mesh comprising 50mm x 200mm mesh with two 8mm horizontal wires at 200mm centres and single 6mm vertical wires at 50mm.

Posts:

Various RHS posts sizes dependent on height (see chart below for details), spaced at 2525mm centres

Post to panel fixing:

Panels fixed to posts with full height 40mm x 5mm clamp bar with bolt fixings at 400mm centres. The full height clamp bars create a flush safe finish with the mesh ends behind the clamp bar.

Gates:

Pedestrian gates are single leaf 1.2m wide, (or width to suit), framed in a 50mm x 50mm RHS with Zaun Duo8 mesh welded inside the frame, with slide latch. Gate supplied with rubber bump stop and 2 x suitable gate posts.

Vehicle access gates are double leaf (single leaf vehicle gates available) 3.0m wide (or width to suit), framed in 50mm x 50mm RHS, with Zaun Duo8 mesh welded inside the frame, with drop bolts and slide latch. Gate supplied with rubber bump stop and 2 x suitable gate posts.

Finish:

Materials are galvanised and Polyester Powder coated.

Drawings:

www.zaun.co.uk/about-us/downloads/drawings/

Specifications:

| Height | Post Centres | Vertical Wires | Horizontal Wires | Mesh Pattern | Post Section |
|----------------------|--------------|----------------|------------------|--------------|--------------|
| 830mm to 2.23 mtr | 2.525 mtr | 6mm | 2 x 8mm | 50mm x 200mm | 60mm x 40mm |
| 2.43 mtr to 3.68 mtr | 2.525 mtr | 6mm | 2 x 8mm | 50mm x 200mm | 80mm x 40mm |
| 3.88 mtr to 4.48 mtr | 2.525 mtr | 6mm | 2 x 8mm | 50mm x 200mm | 100mm x 50mm |
| 5.00 mtr to 6.00 mtr | 2.525 mtr | 6mm | 2 x 8mm | 50mm x 200mm | 120mm x 60mm |

Technical Support

Should you require any help or assistance in your requirement please contact

sales@zaun.co.uk or

call +44 (0)1902 796 699

Turnkey Solutions

Zaun can provide you with solutions to suit all of your sport and perimeter protection requirements, whether you need to protect a school playground or a military base, Zaun has the solutions for you. From perimeter and sports fencing to CCTV and access control, Zaun can provide solutions to your specific requirements.

For more information on any of our products or services please visit our website at:

www.zaun.co.uk