

# ZAUN

Protection Through Innovation



## Sports Fencing, Gates and Play Solutions



[www.zaun.co.uk](http://www.zaun.co.uk)  
(t): +44 (0)1902 796 699 | (e): [info@zaun.co.uk](mailto:info@zaun.co.uk)



# Your Trusted Manufacturing Partner for Sports and Physical Perimeter Security...

Zaun is the only **in-house British Manufacturer of Woven and Welded Mesh Fencing Systems**. For the last 25 years, we have been the **trusted manufacturing partner for sports and physical perimeter security**. With a range of sports fencing, gate, and play solutions we offer Protection Through **Innovation** for your next project.

Our continued investment in our manufacturing processes and systems enables the latest in **problem-solving and innovation**. At the same time, our approach to 'The Right People in the Right Places' puts the **customer experience at the heart of the business**.

The quality of our systems is assured through **ISO 9001 and third-party certification for our high-security and HVM solutions** including LPS 1175, **Secured by Design, Approved for UK Government Use (CPNI/NPSA)**, and **PAS 68**.



[www.zaun.co.uk](http://www.zaun.co.uk)

(t): +44 (0)1902 796 699 | (e): [info@zaun.co.uk](mailto:info@zaun.co.uk)



# Table of Content

Fencing, Gates and Play Solutions

Page 04 Duo Sport



Page 05 Super Rebound



Page 06 Spectator Rail



Page 07 Ball Stop Netting



Page 08 Duo Sport Gates



Page 09 Super Rebound Gates



Page 10 Play Solutions



Page 11 Play Solutions



# Duo Sport

## Twin Wire Sports Fencing



### ABOUT DUO SPORTS

Duo Sport by Zaun has been designed to offer safety and security for sports pitches, players and equipment. Manufactured from twin 8mm horizontal wires electro-welded to a 6mm vertical wire (656 option also available) at 50 x 200mm mesh patterns, it offers a rigid panel that stands the test of time and sports.

With maximum post centres of 2525mm, Duo Sports is the perfect sports fence thanks to its full length 40 x 5mm clamp bar and EPDM insert system. Noise from balls rebounding off the fence is reduced by almost 29% compared to a standard fencing system.

### Finish

All Zaun posts/panels/gates and painted auxiliary components (for example, clamp-bars, slide bolts etc.) benefit from a protective zinc layer and electrostatically applied polyester powder coating to BS 1722-16. Care is taken with pre-treatment to ensure sound adhesion between the zinc and paint layers. In a UK C1 environment, as defined in ISO 12944-2, this should ensure a useful life expectancy of the fence of at least 15-20 years. Life expectancy in all environments can be extended by maintaining the fencing with regular washing. Useful life will be reduced if the fencing is damaged. Any coating damage should be repaired to reduce the effect on useful life.

Enhanced painting systems such as marine coatings are also available for improved life expectancy in C2-C4 environments.

### Sloping Ground

Panels can be stepped as required. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried, cut on-site, or additional posts are used.

### Product Data

Heights:	1030, 2030, 2430, 3008, 4070, 4470, 5070mm
Nominal:	1.0, 2.0, 2.4, 3.0, 4.0, 4.4, 5.0m
Mesh Pattern:	50 x 200mm
Wire Diameter:	1no. 6mm Vertical 2no. 8mm Horizontal
Panel Size:	2510mm
Post Size:	To Suit Fencing
Clamp Bar:	40 x 5mm
Top Edge:	22mm Projection (3.0m is Flush)
Post Centres:	2525mm



[www.zaun.co.uk](http://www.zaun.co.uk)

(t): +44 (0)1902 796 699 | (e): [info@zaun.co.uk](mailto:info@zaun.co.uk)

# Super Rebound Twin Wire Rebound Sports Fencing

## Product Data

Heights:	1008, 2030, 2430, 3008, 4070, 4470, 5070mm
Nominal:	1.0, 2.0, 2.4, 3.0, 4.0, 4.4, 5.0m
Mesh Pattern:	50 x 66.6mm
Wire Diameter:	1no. 6mm Vertical 2no. 8mm Horizontal
Panel Size:	2510mm
Post Size:	To Suit Fencing
Clamp Bar:	40 x 5mm
Top Edge:	22mm Projection (1.0 & 3.0m is Flush)
Post Centres:	2525mm

## ABOUT SUPER REBOUND

Super Rebound by Zaun offers Protection Through Innovation in the form of 50 x 66.6mm mesh patterns for built-in rebound mesh, removing the need for additional rebound boards. Rebound panels are available in Combi (First 1.2m Rebound then the rest of the panel at 50 x 200mm mesh patterns) or Full Panel (2030 & 3008mm all rebound).

Designed to offer a bounce behaviour that is direct and natural. This means that the ball doesn't bounce back in an unexpected direction following contact with the rebound panel during play. Likewise, a full-length clamp bar and EPDM rubber inserts help reduce noise from vibrations.

## Finish

All Zaun posts/panels/gates and painted auxiliary components (for example, clamp-bars, slide bolts etc.) benefit from a protective zinc layer and electrostatically applied polyester powder coating to BS 1722-16. Care is taken with pre-treatment to ensure sound adhesion between the zinc and paint layers. In a UK C1 environment, as defined in ISO 12944-2, this should ensure a useful life expectancy of the fence of at least 15-20 years. Life expectancy in all environments can be extended by maintaining the fencing with regular washing. Useful life will be reduced if the fencing is damaged. Any coating damage should be repaired to reduce the effect on useful life.

Enhanced painting systems such as marine coatings are also available for improved life expectancy in C2-C4 environments.

## Sloping Ground

Panels can be stepped as required. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried, cut on-site, or additional posts are used.



[www.zaun.co.uk](http://www.zaun.co.uk)

(t): +44 (0)1902 796 699 | (e): [info@zaun.co.uk](mailto:info@zaun.co.uk)

# Spectator Rail

## Pitch Safety Fencing

### ABOUT SPECTATOR RAIL

Spectator Rail by Zaun is designed to improve safety for players and spectators, both on, and off the pitch. Featuring either Duo Sports or Super Rebound Mesh Infill Panels and a 48mm CHS tubular handrail system with innovative hidden laser cut tabs that prevent the rails from spinning.

All systems include EPDM rubber inserts to reduce noise from impact during play as well as a full-length clamp bar and anti-tamper fixings for increased security. For added protection, all spectator railing systems include safety capping strips to protect players and spectators from any sharp edges. Advertising can be attached to the panels as standard.

### Finish

All Zaun posts/panels/gates and painted auxiliary components (for example, clamp-bars, slide bolts etc.) benefit from a protective zinc layer and electrostatically applied polyester powder coating to BS 1722-16. Care is taken with pre-treatment to ensure sound adhesion between the zinc and paint layers. In a UK C1 environment, as defined in ISO 12944-2, this should ensure a useful life expectancy of the fence of at least 15-20 years. Life expectancy in all environments can be extended by maintaining the fencing with regular washing. Useful life will be reduced if the fencing is damaged. Any coating damage should be repaired to reduce the effect on useful life.

Enhanced painting systems such as marine coatings are also available for improved life expectancy in C2-C4 environments.

### Sloping Ground

Panels can be stepped as required. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried, cut on-site, or additional posts are used.

### Product Data

Heights:	1200mm
Nominal:	1.2m
Mesh Pattern:	50 x 200mm or 50 x 66.6mm
Wire Diameter:	1no. 6mm Vertical 2no. 8mm Horizontal
Tube Diameter:	48.3mm
Panel Size:	2510mm
Post Size:	60 x 60mm
Clamp Bar:	40 x 5mm
Top Edge:	Capping Strip
Post Centres:	2525mm



[www.zaun.co.uk](http://www.zaun.co.uk)

(t): +44 (0)1902 796 699 | (e): [info@zaun.co.uk](mailto:info@zaun.co.uk)



# Ball Stop Netting Sports Netting

## Product Data

Heights: up to 8m

Mesh Pattern: 100 x 100mm  
Material: Polypropylene

Post Sizes: To Suit Fencing  
Post Centres: 5m to 10m supplied  
with strainers

## ABOUT BALL STOP NETTING

Ball Stop Netting by Zaun is a cost effective solution when you need to increase the ball retention height of your Duo Sports or Super Rebound sports fencing system. Manufactured from high tenacity polypropylene with a 100 x 100 x 2.3mm mesh pattern it has a breaking strain of circa. 125kg per mesh panel.

UV and weather-resistant in a wide range of RAL colours to match your fencing system, the edges are reinforced and stitched with 3mm braid for additional strength and durability. Heights of up to 8m are achieved when matched with our sports fencing systems, however stand alone systems are available. (Please contact us for further information)


## Finish

All Zaun posts/panels/gates and painted auxiliary components (for example, clamp-bars, slide bolts etc.) benefit from a protective zinc layer and electrostatically applied polyester powder coating to BS 1722-16. Care is taken with pre-treatment to ensure sound adhesion between the zinc and paint layers. In a UK C1 environment, as defined in ISO 12944-2, this should ensure a useful life expectancy of the fence of at least 15-20 years. Life expectancy in all environments can be extended by maintaining the fencing with regular washing. Useful life will be reduced if the fencing is damaged. Any coating damage should be repaired to reduce the effect on useful life.

Enhanced painting systems such as marine coatings are also available for improved life expectancy in C2-6M environments.

## Sloping Ground

Panels can be stepped as required. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried, cut on-site, or additional posts are used.

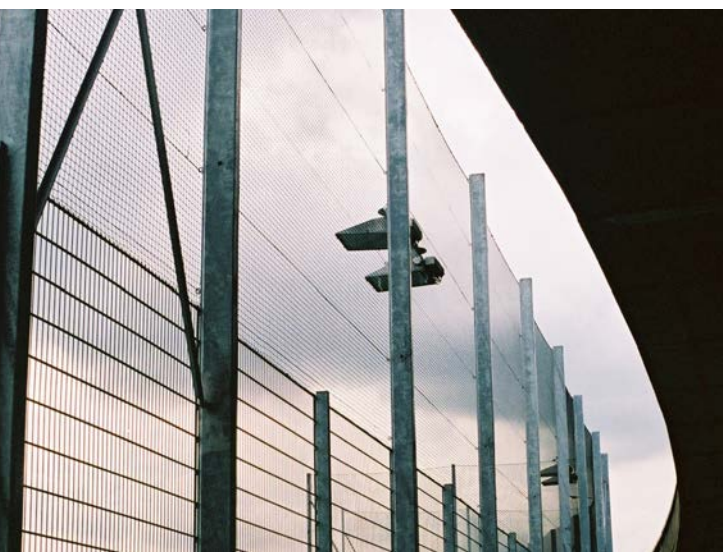

[www.zaun.co.uk](http://www.zaun.co.uk)

(t): +44 (0)1902 796 699 | (e): [info@zaun.co.uk](mailto:info@zaun.co.uk)

# Duo Sports Gates

## Twin Wire Sports Gates



### ABOUT DUO SPORT GATES

Duo Sport Gates by Zaun offer a seamless ingress and egress to match your Duo Sport fencing. Available in either single leaf or double leaf options for pedestrian and vehicle access with 868 or 656 Duo Sport infill panels.

Lintel Bars and Lintel Panels are available as standard on all our Duo Sport Gates allowing heights to match your fencing system. All gates above 1.8m in height are supplied with three safety points, either supplied as three hinges and/or supplied with gate arrestor cables and are manufactured to comply with BS 1722 Part 14 : 2017. A wide range of locking mechanisms are available.

### Finish

All Zaun posts/panels/gates and painted auxiliary components (for example, clamp-bars, slide bolts etc.) benefit from a protective zinc layer and electrostatically applied polyester powder coating to BS 1722-16. Care is taken with pre-treatment to ensure sound adhesion between the zinc and paint layers. In a UK C1 environment, as defined in ISO 12944-2, this should ensure a useful life expectancy of the fence of at least 15-20 years. Life expectancy in all environments can be extended by maintaining the fencing with regular washing. Useful life will be reduced if the fencing is damaged. Any coating damage should be repaired to reduce the effect on useful life.

Enhanced painting systems such as marine coatings are also available for improved life expectancy in C2-C4 environments.

### Product Data

Heights:	To match fencing
Mesh Pattern:	50 x 200mm
Wire Diameter:	1no. 6mm Vertical 2no. 8mm Horizontal
Gate Widths:	1.2m SL* 3.0m DL*
Opening:	Inwards, Outwards and Centre Hung
Variations:	Base-Plated In-ground

\*Other widths are available please contact Zaun for further information



[www.zaun.co.uk](http://www.zaun.co.uk)

(t): +44 (0)1902 796 699 | (e): [info@zaun.co.uk](mailto:info@zaun.co.uk)



# Super Rebound Gates

## Twin Wire Rebound Sports Gates

### Product Data

Heights:	To match fencing
Mesh Pattern:	To match fencing
Wire Diameter:	1no. 6mm Vertical 2no. 8mm Horizontal
Gate Widths:	1.2m SL* 3.0m DL*
Opening:	Inwards, Outwards and Centre Hung
Variations:	Base-Plated In-ground

\*Other widths are available please contact Zaun for further information

### ABOUT SUPER REBOUND GATES

Super Rebound Gates by Zaun provide the same rebound properties of our Super Rebound fencing but in gate form. Infill panels can be manufactured to match your Super Rebound configuration in either combi (1.2m) or full rebound.

Lintel Bars and Lintel Panels are available as standard on all our Super Rebound Gates allowing heights to match your fencing system. All gates above 1.8m in height are supplied with three safety points, either supplied as three hinges and/or supplied with gate arrestor cables and are manufactured to comply with BS 1722 Part 14 : 2017. A wide range of locking mechanisms are available.

### Finish

All Zaun posts/panels/gates and painted auxiliary components (for example, clamp-bars, slide bolts etc.) benefit from a protective zinc layer and electrostatically applied polyester powder coating to BS 1722-16. Care is taken with pre-treatment to ensure sound adhesion between the zinc and paint layers. In a UK C1 environment, as defined in ISO 12944-2, this should ensure a useful life expectancy of the fence of at least 15-20 years. Life expectancy in all environments can be extended by maintaining the fencing with regular washing. Useful life will be reduced if the fencing is damaged. Any coating damage should be repaired to reduce the effect on useful life.

Enhanced painting systems such as marine coatings are also available for improved life expectancy in C2-C4 environments.



[www.zaun.co.uk](http://www.zaun.co.uk)

(t): +44 (0)1902 796 699 | (e): info@zaun.co.uk

# Play Solutions

## Solutions for your sports pitches

### ABOUT PLAY SOLUTIONS

At Zaun we know that sports pitches aren't just about the fencing and gates. That is why we have a wide range of Play Solutions for your next project.

From integrated basketball hoops and goal ends to roof top netting, our team are on hand to offer you the latest advice on our range of Play Solutions.





# Play Solutions

## Solutions for your sports pitches



Junior Goal End



Curved Corners



Recessed MUGA Goal Ends



Recessed Storage Area





Explore our full range of Fencing, Gates and HVM Solutions including the latest LPS 1175 C5 (SR3) and D10 (SR4) at [www.zaun.co.uk](http://www.zaun.co.uk)

# Your Trusted Manufacturing Partner for Sports and Physical Perimeter Security

**ZAUN**  
Protection Through Innovation

**Head Office:**

Steel Drive, Wolverhampton, West Midlands  
WV10 9ED, United Kingdom

T: +44 (0)1902 796 699

E: [info@zaun.co.uk](mailto:info@zaun.co.uk)

[www.zaun.co.uk](http://www.zaun.co.uk)

**Legal Notice:**

All information contained within this document including technical details, graphics, and photographs are copyright Zaun Limited 2023. This document may not be reproduced, copied, transmitted, or stored in any form without written permission of Zaun Limited.

All information correct at time of printing. We reserve the right to alter specification without notice. Wire tolerances due to manufacturing + or - 0.3mm



[www.zaun.co.uk](http://www.zaun.co.uk)  
(t): +44 (0)1902 796 699 | (e): [info@zaun.co.uk](mailto:info@zaun.co.uk)

