



Benefits

- LPCB LPS1175 SR1 Rated
- Security Rated at SR1 by BRE as featured in the Red Book
- Secured By Design approved
- Designed with twin 8mm horizontal wires
- Open mesh pattern provides high visibility to monitor sites without restriction
- Strong and robust for a high level of vandal resistance
- Available either bolt down, in ground or on wall



Conforms
to BS1722:
Part 14

Zaun's Duo8 SR1 double wire system is ideal for use in applications where Secured by Design accreditation is required.

The Duo8 SR1 is manufactured from dual horizontal 8mm wires sandwiching a single 6mm vertical wire, producing a 50mm x 200mm mesh pattern that is not only strong and vandal resistance but also offers the best value. Fence panels are available in 2.0 metre and 2.4 metre in height.

Coupled with Zaun's tamper resistant fasteners, the result is a rigid perimeter fence that offers a high degree of vandal resistance and an extremely high level of through visibility.

The Duo8 SR1 fencing system offers the same product benefits as the standard Duo8, but with added security and tamper resistant clamp bars and fixings



Finish.

Galvanised & polyester powder coated, after stringent cleaning & treatment to give a well adhered coating with a minimum of 60 microns. Available in a full range of RAL colours including marine coating.

Posts & Fixings

Panels fixed to posts with full height 40mm x 5mm clamp bar with stainless steel fixings at 400mm centres. The full height clamp bars create a flush safe finish with the mesh ends behind the clamp bar, with an enhanced over clip on the upper most and lower most fixings.

Variations


Posts are available in different lengths to accommodate panel heights and ground conditions. Additional variations are also available:

- Wall fixing, cranked posts or base plated
- Cranked panels
- Extended posts for CCTV, lighting or physical security devices

Gates:

Pedestrian gates are single leaf 1.2m wide, (or width to suit), framed in a 50mm x 50mm RHS with Zaun Duo8 mesh welded inside the frame, with slide latch. Gate supplied with rubber bump stop and 2 x suitable gate posts.

Vehicle access gates are double leaf (single leaf vehicle gates available) 3.0m wide (or width to suit), framed in 50mm x 50mm RHS, with Zaun Duo8 mesh welded inside the frame, with drop bolts and slide latch. Gate supplied with rubber bump stop and 2 x suitable gate posts.

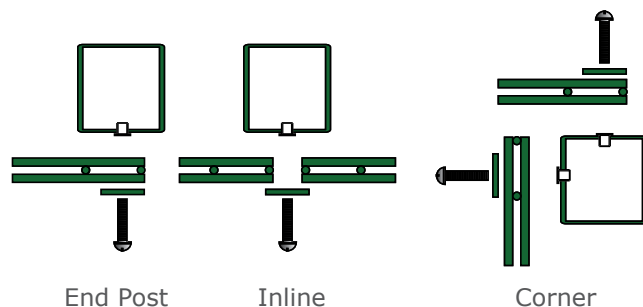

Specification

Height: 2030, 2430

Note: Other heights are also available upon request.

Panel Width: 2510mm

Mesh Size: 200mm x 50mm

Wire Diameter: 6mm Verticals
2 x 8mm Horizontals

Top Edge Projection: 22mm

Post Size: 60 x 40 / 80 x 40

Clamp Bar Size: 40 x 5mm

Post Centres: 2525mm

Fixing Centres: 400mm

Fixings: Anti Tamper Security
Fixings

Applications



Drawings

DWG and PDF drawings available from our website www.zaun.co.uk/drawings

Version 20220817